Update the Configuration Files in SignCutX2

With the installation of SignCutX2, all the configuration files for different plotters will be built in the program folder. If the configuration files for Rheinstern LB-Serie have not been built after the installation, you can install or update them manually.

Update the Configuration Files

Follow the steps below to install the SigncutX2 and update the configuration files.

1. Install the SigncutX2 with the Software-CD or the installation package.
2. Download the configuration files such as RheinsternLB720.ini for SigncutX2 at www.rheinstern.com/download_en.html.
3. Copy the files to the folder “C:\Programme\SignCut X2\Drivers”

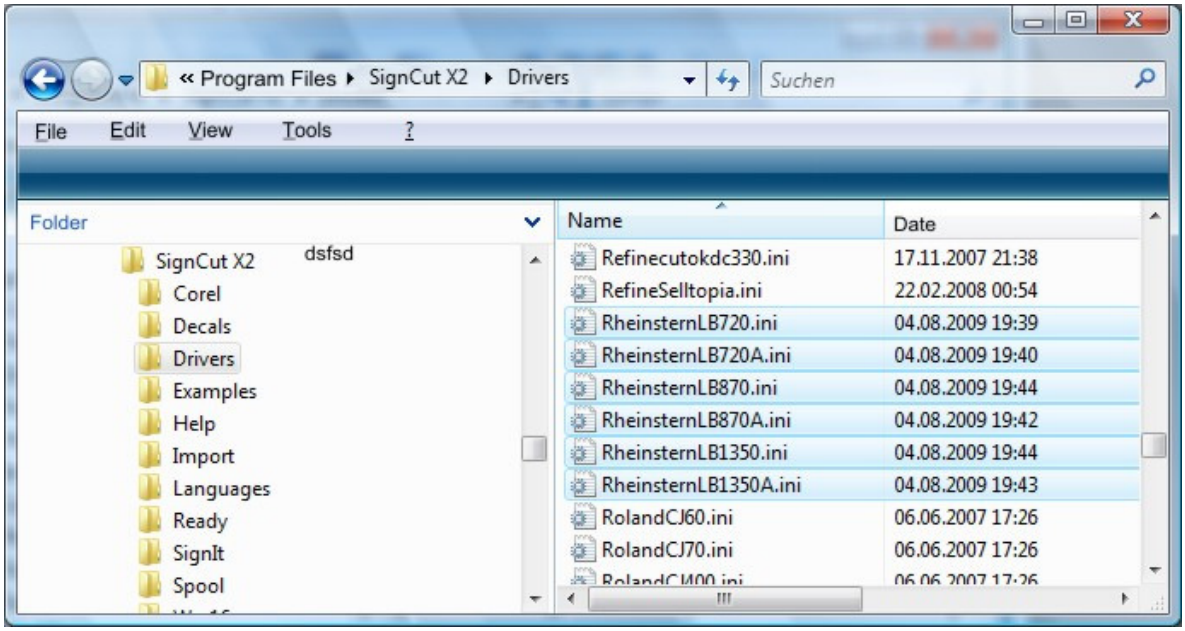

After the copy of the configuration files, SignCutX2 is ready to start and plot.

Parameters for the Data Transfer via USB-Port

With the new configuration files, the parameters for data transmission via USB-Port will be set properly. The figure below shows the result, which can be called in SignCut through “Settings”->“Cutter“.

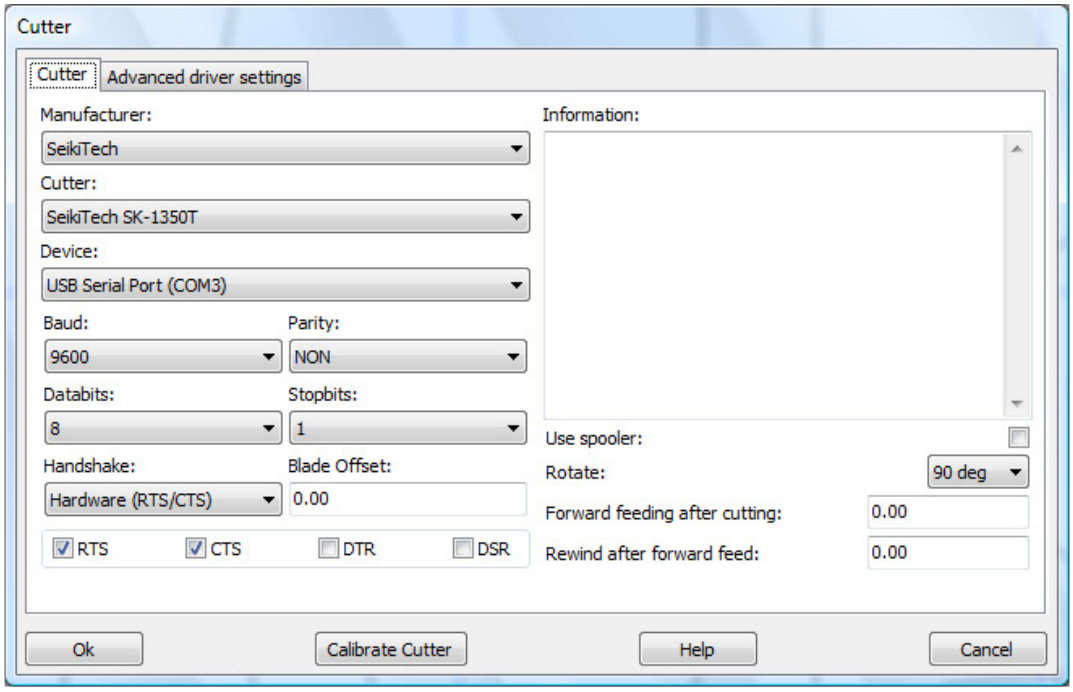

Parameters for the Data Transfer via COM-Port
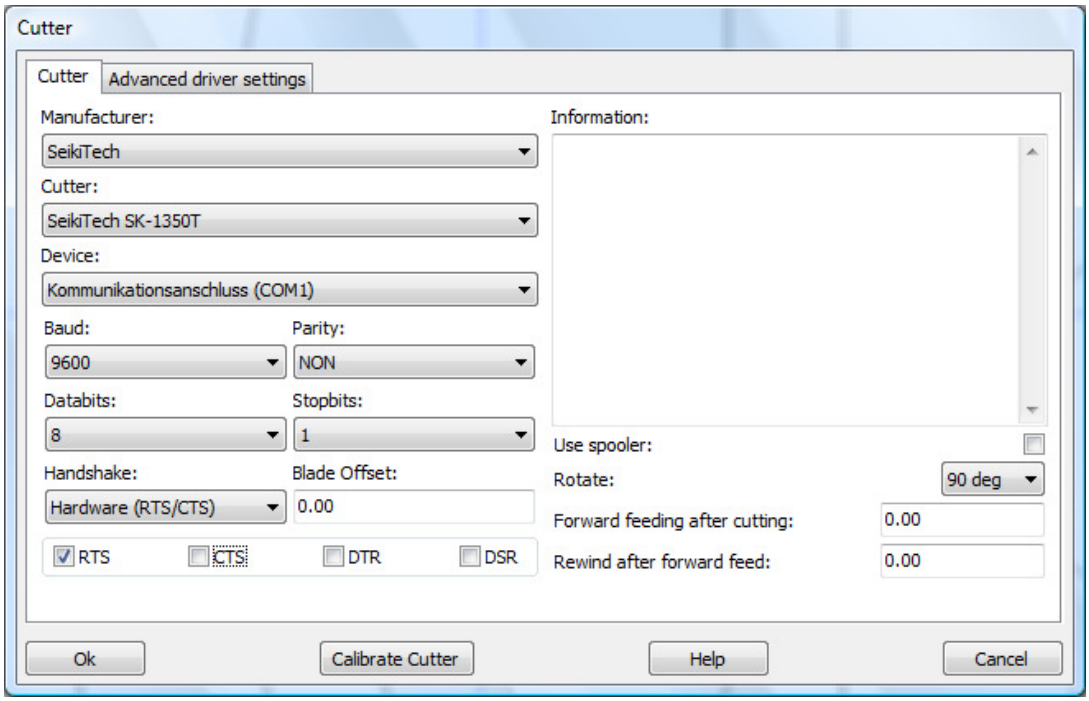
If you prefer to use the serial port for the data transmission, please unselect the checkbox “CTS”, it means only the checkbox “RTS” should be active for the hand shake.